
MOTOR/CLUTCH ASSEMBLY

Figure 4

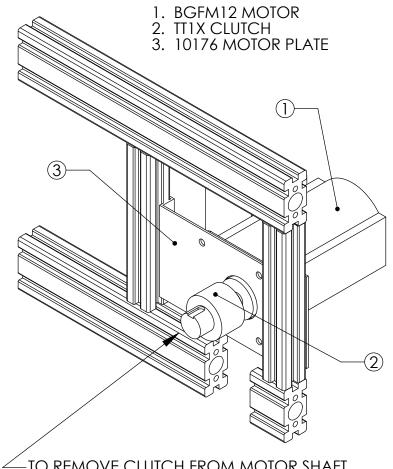

TO REMOVE CLUTCH FROM MOTOR SHAFT, LOOSEN (2) SETSCREWS WITH 3/32" ALLEN WRENCH FROM BOTTOM SIDE. ONE SETSCREW IS MATED WITH SHAFT FLAT.